

OUTBOARD 4000RS

- SYNTHETIC PLUS -

Standards : API SL




● Available grade:

10W40 – 25W40

OUTBOARD 4000 RS is a high-quality synthetic lubricant developed for four-stroke outboard motor boats and designed for leisure use. IPONE has selected the best quality synthetic bases and the most suitable additives to comply with the marine FC-W standard and guarantee optimal protection for your engine.



● Packaging:

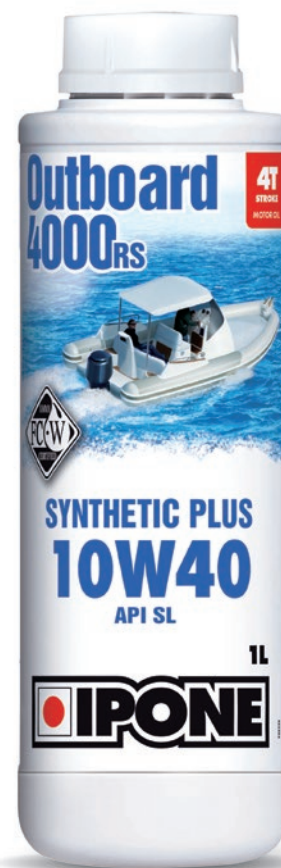

● Technical data:

TEST	METHOD	TYPICAL VALUES		UNITS OF MESURE
		10W40	25W40	
DENSITY AT 20° C	ISO12185	0,867	0,885	G/cm ³
VISCOSITY AT 100° C	ASTM D445	13,5	13,77	mm ² /s
VISCOSITY AT 40° C	ASTM D445	90,2	125	mm ² /s
VISCOSITY INDEX (VIE)	ASTM D 2270	151	107	-
FLASH POINT	ASTM D92	224	248	°C
POUR POINT	ASTM D97	-33	-24	°C
TBN	ASTM D2896	7,4	7,4	mgKOH/g
TAN	ASTM D664	3	2,7	mgKOH/g
N°NMMA	-	FCW FB202-40R	FCW FB-20071R	-



La Meunière - CS 10001 - FR 13480 CABRIÈS - TÉL. : +33 4 42 94 05 65 - Fax : +33 4 42 94 05 66

info@ipone.fr - www.ipone.com - /iponelube - /iponelube - iponelube